



▲ CAL 4164



Optional Configuration with LP Drive 300



Can be mounted in different styles



Easy to use Control Panel

▼ PND 6262

Specification

Construction

- Heavy-duty steel

Drive Bay

- External: 5.25 x1, Internal: 3.5" x1

Air Filter

- One replaceable air filter

Cooling Fan

- One 12 cm ball-bearing fans

Indicator

- HDD x1+ Power on/off x1

Switch

Power on/off x1 , System reset x1

Speaker

- One 8dspeaker

Connector

- One 6-pin PS/2 K/B Connector on the front panel with cap

Standard Color

- Beige, Black

Operating Temperature Range

- 0 to +40°C

Storage Temperature Range

- 0 to +70°C

Relative Humidity

- 5% to 95%, non-condensing

Dimension

CAL-4164 (1) / PND6262 (2)

- (1) 482(W) x 407(D) x 177(H) mm 19"(W) x 16"(D) x 7"(H)
- (2) 220(W) x 407(D) x 177(H) mm 8.66"(W) x 16"(D) x 7"(H)


Weight Net:

CAL-4164 (1) / PND6262 (2)

- (1) Net: 8.5 kg (18.7 lb) ; Gross: 9.5 kg (20.9 lb)
- (2) Net: 8.5 kg (18.7 lb) ; Gross: 9.5 kg (20.9 lb)

Backplane:

- PBP-06I: 6-slot PISA bus PICMG backplane
- PBP-06P4: 6-slot (4xPCI) PICMG backplane
- PBP-06P3: 6-slot (3xPCI) PICMG backplane

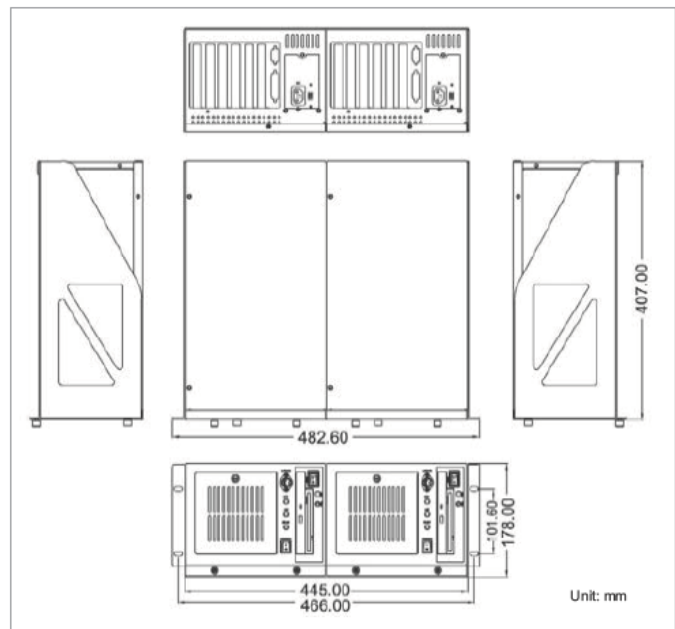

Ordering Information

CAL-4164-00

- Two Sets of PND-6262 with rackmount kit, 6-slot full-sized industrial node chassis

PND-6262-00

- 6-slot full-sized industrial node chassis