



Features:

- 5.25"x3 +2 internal 3.5" HDD drive bays for RAID 0, 1, 5 & CD-ROM
- 2 USB ports at the front
- Three cooling fans and easy-to-install drive bracket with shock-resistant cushion
- Replaceable air filter for easy cleaning
- One power on/off switch with LED indicators and one reset switch inside the lockable door
- Lockable front door with thumb lock for dust-proof and better security
- Support 20-slot ISA, 19-slot PICMG and multiple-system backplanes
- Safety-approved 450W ATX power supply installed

Specification

Construction

- Heavy-duty steel with aluminum front panel

Drive Bay

- External: 5.25"x3 Internal: 3.5" HDD x2

Card Retainer

- Three locations for one card retainer

Air Filter

- One replaceable air filter

Cooling Fan

- One 12 cm and one 8 cm ball-bearing cooling fans

Indicator

- Power on/off x1, HDD x1

Switch

- Power on/off x1, System reset x1

Connector

- Four USB ports on the front panel

Standard Color

- Silver

Dimension

- 482(W) x 646(D) x 177(H) mm; 19"(W) x 25.4"(D) x 7"(H)

Weight

- Net: 20.0 kg (44 lb); Gross: 22.0 kg (48.5 lb)

Backplane

- PBP-20I: 20-slot ISA backplane
- PBP-2003: 20-slot 4-system PICMG backplane
- PBP-19AI: 19-slot (18xPCI) active PICMG backplane
- PBP-19AC: 19-slot (12xPCI) active PICMG backplane
- PBP-19P4: 19-slot (4xPCI) active PICMG backplane
- PBP-18D4: 18-slot dual-system PICMG backplane

Speaker

- One 8dspeaker

Operating Temperature Range

- 0 to +55°C

Storage Temperature Range


- 0 to +70°C

Relative Humidity

- 5% to 95%, non-condensing

Vibration

- 5~7 Hz: 0.5" double amplitude displacement
7~2000 Hz: 1.5g acceleration

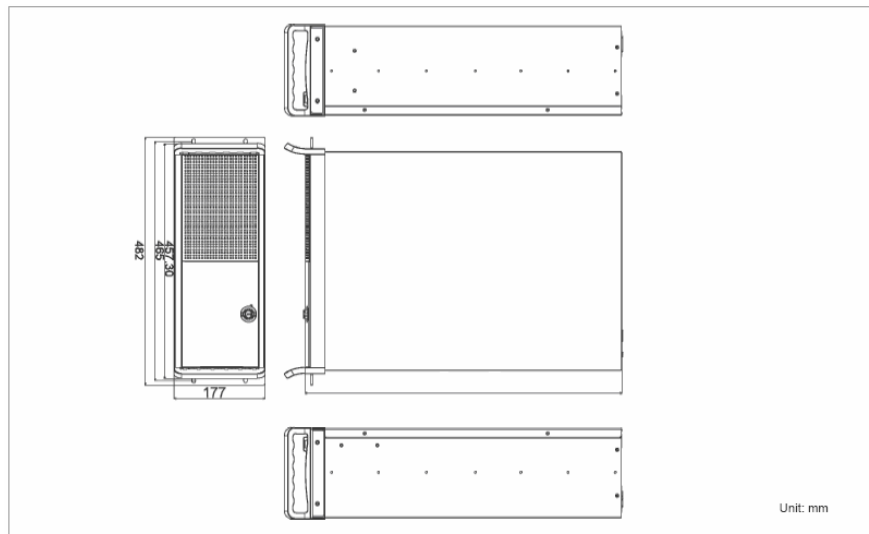

Ordering Information

SE4365-00-00 - 19" 4U rack-mount chassis with 20-slot Backpanel