



Redundant Power Supply Option



Can be mounted in Different styles



Dual card retainers

### Specification

#### Construction

- Heavy-duty steel

#### Drive Bay

- External: 5.25 x2, 3.5" FDD x1
- Internal: 3.5" x1

#### Card Retainer

- Two locations for one card retainer

#### Air Filter

- One replaceable air filter

#### Cooling Fan

- One 12 cm ball-bearing fans

#### Indicator

- HDD x1+ Power on/off x1

#### Switch

Power on/off x1 , System reset x1

#### Speaker

- One 8dspeaker

#### Connector

- PortsOne 5-pin AT K/B connector

#### Standard Color

- Beige, Black

#### Operating Temperature Range

- 0 to +40°C

#### Storage Temperature Range

- 0 to +70°C

#### Relative Humidity

- 5% to 95%, non-condensing

#### Dimension


- 330(W) x 408(D) x 172(H) mm
- 13"(W) x 16.1"(D) x 6.77"(H)

#### Weight Net:

- Net: 9 kg (19.8 lb) ; Gross: 10 kg (22 lb)

#### Backplane:

- PBP-08I: 8-slot PISA bus PICMG backplane
- PBP-08P4: 8-slot (4xPCI) PICMG backplane
- PBP-08P3: 8-slot (3xPCI) PICMG backplane

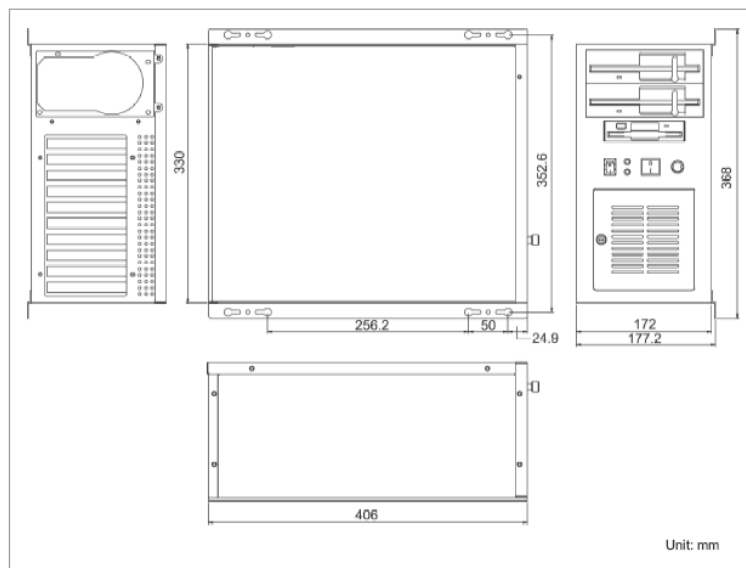

### Ordering Information

CAL-308-00

- 8-slot full-sized industrial node chassis