



### DF117 Single Console

1080p  
Full HD



### Drawer Features & Display Benefits

- ▶ 1U dual slide 17" widescreen LCD console drawer
- ▶ Support **Full HD** with 1080p resolution
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with touchpad
- ▶ MAC or SUN Micro keyboard options available
- ▶ Enhanced aesthetics with new molded front panel and two point lock

### Options

- 3G / HD / SD-SDI Broadcast-grade input ( w/ speaker )
- HDMI ( w/ speaker )
- DC power : 12V / 24V / 48V / 125V / 250V

### Specifications

#### • LCD Panel

Size (diagonal) :	17.3" widescreen TFT
Max resolution :	1920 x 1080
Brightness (cd/m2) :	400
Backlight :	LED
Colors :	16.7 M, 8-bit
Contrast ratio (typ) :	600 : 1
Viewing angle (H/V) :	160° x 140°
Active area (mm) :	382 x 215
MTBF (hrs) :	50,000
Video input :	VGA or DVI-D

- **Speaker :** Built-in Dual Stereo Speakers  
( HDMI only ) 2W x 2

- **Casing Color :** Black ( RAL 9005 )

- **Power Input :** Auto-sensing 100 to 240VAC,  
50 / 60Hz

#### • Power Consumption ( single console )

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

#### • Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration ( 11ms duration )
Vibration :	5~500Hz 1G RMS random vibration

#### • Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

#### • Weight ( single console )

Net :	11.9 kgs / 26.2 lbs
Gross :	17.9 kgs / 39.4 lbs

#### • Dimensions ( single console )

Product :	441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch
Packing :	595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

### Console Cable

#### CX-6

- 6 feet DVI-D console cable ( bundle )
- DVI-D + USB, server end
- DVI-D + DB15 ( USB KB & MS ), console port


or

#### CB-6

- 6 feet VGA console cable ( alternative )
- VGA + USB, server end
- DB15 ( VGA, USB KB & MS ), console port

### Standard Keyboard

**Ge** G keyboard integrated with touchpad

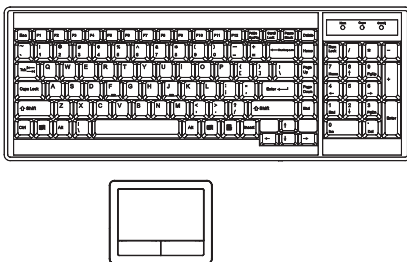

#### Supporting layouts

<b>America</b>					
	United States				
<b>EMEA</b>	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
<b>Asia</b>					
	China	Japan	Korea	Arabia	Turkey

### Keyboard Options

\* US layout only

**Me** Mac keyboard with touchpad



**Se** S keyboard with touchpad



## 1U Dual Slide 17" FHD LCD KVM Drawer



### • Dimensions ( with KVM )

Product : 441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch

Packing : 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

### • Weight

Net : 12.9 kgs / 28.4 lbs

Gross : 18.9 kgs / 41.6 lbs

### • Power Consumption with KVM integration :

Screen on : Max. 55W

Power saving mode : Max. 34W

### • Casing Color : Black ( RAL 9005 )

\* For details, please refer to our KVM rear kit user manuals.

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf)

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	DF117 - MUIP1613	DF117 - MUIP3213
	1	1	2	-	DF117 - MUIP1624	DF117 - MUIP3224
	1	1	0	-	DF117 - MU1602	DF117 - MU3202
	1	2	0	-	DF117 - MU1603	DF117 - MU3203
	1	3	0	-	DF117 - MU1604	DF117 - MU3204

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf)

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	DF117 - UIP802	DF117 - UIP1602	DF117 - UIP3202
	1	1	0	DF117 - U802	DF117 - U1602	DF117 - U3202
	1	0	0	DF117 - U801	DF117 - U1601	DF117 - U3201

Cat6 KVM Dongle : DG-100S ( VGA-USB ) / DG-100 ( VGA-PS/2 ) / DG-100SD ( DVI-USB )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf)

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	DF117 - MIP813	DF117 - MIP1613	-
	1	1	2	DF117 - MIP824	DF117 - MIP1624	-
	1	1	0	DF117 - M802	DF117 - M1602	-
	1	2	0	DF117 - M803	DF117 - M1603	-
	1	3	0	DF117 - M804	DF117 - M1604	-

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf)

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	DF117 - IP802	DF117 - IP1602	-
	1	1	0	DF117 - 802	DF117 - 1602	-
	1	0	0	DF117 - S801	DF117 - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 ( 6, 10 or 15 ft )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVVKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVVKVM-KIT.pdf)

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	DF117 - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 ( 6 or 15 ft )