



L120 Single Console

Drawer Features & Display Benefits

- ▶ 1U 20" LCD console drawer
- ▶ Ultra high resolution 1600 x 1200
- ▶ 104-key keyboard with touchpad
- ▶ Enhanced aesthetics with molded front handle and two point lock

Options

- S-Video + Composite (BNC)
- HDMI or DVI-D (either one)
- DC power : 12V / 24V / 48V / 125V / 250V



Specifications

• LCD Panel

Manufacturer :	LG
Size (diagonal) :	20.1" TFT
Max resolution :	1600 x 1200
Brightness (cd/m2) :	300
Backlight :	CCFL
Colors :	16.7 M
Contrast ratio (typ) :	800 : 1
Viewing angle (H/V) :	178° x 178°
Active area (mm) :	408 x 306
MTBF (hrs) :	45,000
Video input :	VGA

- **Speaker :** Built-in Dual Stereo Speakers (HDMI only)
2W x 2

- **Casing Color :** Black (RAL 9005)

- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption (single console)

Sreen on :	Max. 48W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	cUL, FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

Net :	14.5 kgs / 31.9 lbs
Gross :	22 kgs / 48.4 lbs

• Dimensions (single console)

Product :	439.6 x 650 x 44 mm / 17.3 x 25.6 x 1.73 inch
Packing :	595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

Console Cable

CB-6

- 6 feet VGA console cable (bundle)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port



or

CE-6 (for PS/2 KB / MS)

- 6 feet Combo KVM cable (alternative)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port

Keyboard

Ge G keyboard integrated with touchpad

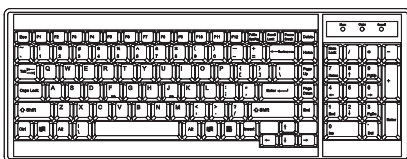

Supporting layouts

America					
	United States				
EMEA					
	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia					
	China	Japan	Korea	Arabia	Turkey



• Dimensions (with KVM)

Product : 439.6 x 650 x 44 mm / 17.3 x 25.6 x 1.73 inch

Packing : 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

• Weight

Net : 15.5 kgs / 34.1 lbs

Gross : 23.4 kgs / 51.5 lbs

• Power Consumption with KVM integration :

Screen on : Max. 78W

Power saving mode : Max. 34W

• Casing Color : Black (RAL 9005)

* For details, please refer to our KVM rear kit user manuals.

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	L120 - MUIP1613	L120 - MUIP3213
	1	1	2	-	L120 - MUIP1624	L120 - MUIP3224
	1	1	0	-	L120 - MU1602	L120 - MU3202
	1	2	0	-	L120 - MU1603	L120 - MU3203
	1	3	0	-	L120 - MU1604	L120 - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	L120 - UIP802	L120 - UIP1602	L120 - UIP3202
	1	1	0	L120 - U802	L120 - U1602	L120 - U3202
	1	0	0	L120 - U801	L120 - U1601	L120 - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	L120 - MIP813	L120 - MIP1613	-
	1	1	2	L120 - MIP824	L120 - MIP1624	-
	1	1	0	L120 - M802	L120 - M1602	-
	1	2	0	L120 - M803	L120 - M1603	-
	1	3	0	L120 - M804	L120 - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	L120 - IP802	L120 - IP1602	-
	1	1	0	L120 - 802	L120 - 1602	-
	1	0	0	L120 - S801	L120 - S1601	-

USB KVM Cable : CB-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	L120 - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)