


MBU4155

Industrial Motherboard Series

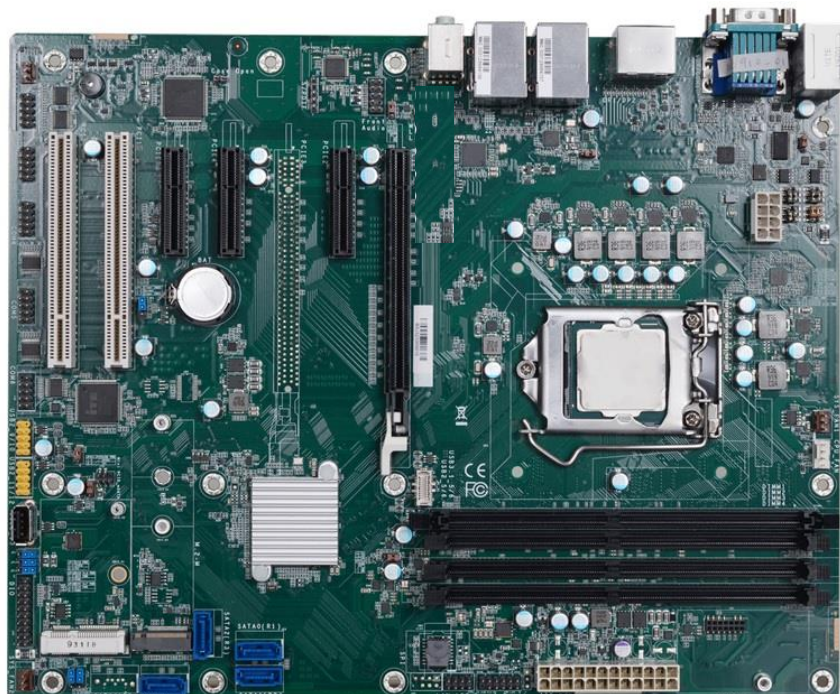

MBU4155

PRODUCT HIGHLIGHTS

- ▶ Intel Xeon®/8th/9th Gen Intel® Core™ with Intel® C246
- ▶ 4 DDR4 DIMM up to 128GB (ECC/non ECC)
- ▶ Multiple expansion: 1 PCIe x16, 3 PCIe x4, 2 PCI, 1 Mini PCIe, 1 M.2 M key, 1 SMBus, 1 LPC
- ▶ 3 independent displays: VGA + DP++ + DP++
- ▶ Rich I/O: 2 Intel GbE, 6 COM, 2 USB 3.1 Gen 2, 4 USB 3.1 Gen 1, 7 USB 2.0
- ▶ 15-Year CPU Life Cycle Support Until Q2' 33 (Based on Intel IOTG Roadmap)



TECHNICAL INFORMATION


SYSTEM	PROCESSOR	8th Generation Intel® Core™/Pentium®/Celeron® LGA 1151 Socket Processors: Intel® Xeon® E-2176G (6 Cores, 12M Cache, up to 4.7 GHz); 80W Intel® Xeon® E-2124G (4 Cores, 8M Cache, up to 4.5 GHz); 71W Intel® Core™ i7-8700K (6 Cores, 12M Cache, up to 4.7 GHz); 95W Intel® Core™ i7-8700 (6 Cores, 12M Cache, up to 4.6 GHz); 65W Intel® Core™ i7-8700T (6 Cores, 12M Cache, up to 4.0 GHz); 35W Intel® Core™ i5-8500 (6 Cores, 9M Cache, up to 4.1 GHz); 65W Intel® Core™ i5-8500T (6 Cores, 9M Cache, up to 3.5 GHz); 35W Intel® Core™ i3-8100 (4 Cores, 6M Cache, 3.6 GHz); 65W Intel® Core™ i3-8100T (4 Cores, 6M Cache, to 3.1 GHz); 35W Intel® Pentium® G5400 (2 Cores, 4M Cache, 3.7 GHz); 58W Intel® Pentium® G5400T (2 Cores, 4M Cache, 3.1 GHz); 35W Intel® Celeron® G4900 (2 Cores, 2M Cache, 3.1 GHz); 54W Intel® Celeron® G4900T (2 Cores, 2M Cache, 2.9 GHz); 35W 9th Generation Intel® Core™ LGA 1151 Socket Processors: Intel® Xeon® E-2278GEL (8 Cores, 16M Cache, up to 3.9 GHz); 35W Intel® Xeon® E-2226GE (6 Cores, 12M Cache, up to 4.6 GHz); 80W Intel® Core™ i7-9700TE (8 Cores, 12M Cache, up to 3.8 GHz); 35W Intel® Core™ i5-9500E (6 Cores, 9M Cache, up to 4.2 GHz); 65W Intel® Core™ i5-9500TE (6 Cores, 9M Cache, up to 3.6 GHz); 35W Intel® Core™ i3-9100E (4 Cores, 6M Cache, 3.7 GHz); 65W Intel® Core™ i3-9100TE (4 Cores, 6M Cache, to 3.2 GHz); 35W
	CHIPSET	Intel® C246 Chipset
	MEMORY	Four 288-pin ECC/Non-ECC DIMM up to 128GB Dual Channel DDR4 2400/2666MHz (ECC/non ECC)
	BIOS	SPI 128Mbit
	CONTROLLER	Intel® HD Gen 9 Graphics
GRAPHICS	FEATURE	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9
	DISPLAY	1 x VGA 2 x DP++ VGA: resolution up to 1920x1200 @ 60Hz DP++: resolution up to 4096x2160 @ 60Hz
	TRIPLE DISPLAYS	VGA + DP++ + DP++

TECHNICAL INFORMATION (CONTINUED)


EXPANSION	INTERFACE	1 x PCIe x16 (Gen 3) (x8/x8 signals as opt., MOQ required) 3 x PCIe x4 (Gen 3) 2 x PCI 1 x Mini PCIe (PCIe/mSATA, share w/SATA conn. as opt./USB2.0) 1 x M.2 2242/2280 M key (PCIe x4 NVMe, Intel Optane Memory Support)
AUDIO	AUDIO CODEC	Realtek ALC888S
ETHERNET	CONTROLLER	1 x Intel® I211AT PCIe (10/100/1000Mbps) 1 x Intel® I219LM PCIe with iAMT12.0 (10/100/1000Mbps) (only Xeon/Core i7/i5 supports iAMT)
REAR I/O	ETHERNET	2 x GbE (RJ-45)
	SERIAL	1 x RS-232/422/485 (RS-232 w/power (DB-9)
	USB	4 x USB 3.1 (Gen1) 2 x USB 2.0
	PS/2	1 x PS/2 (mini-DIN-6)
	DISPLAY	1 x VGA 2 x DP++
	AUDIO	1 x Line-out, 1 x Mic-in, 1 x Line-in (opt., MOQ required)
INTERNAL I/O	SERIAL	5 x RS-232 (2.54mm pitch)
	USB	2 x USB 3.1 Gen2 (2.00mm pitch) 5 x USB 2.0 (2.54mm pitch) (4 x Pin Header, 1 x USB2.0 vertical Type A)
	AUDIO	1 x S/PDIF 1 x Front Audio Header
	SATA	4 x SATA 3.0 RAID 0/1/5/10
	DIO	1 x 8-bit DIO
	LPC	1 x LPC (supports LPC EXT-RS232/RS485 module)
	SMBUS	1 x SMBus
	OUTPUT & INTERVAL	System Reset, Programmable via Software from 1 to 255 Seconds
	SECURITY TPM	Infineon TPM2.0/1.2 (opt., MOQ required)
	TYPE	ATX
	CONNECTOR	8-pin ATX 12V power 24-pin ATX power
	CONSUMPTION	Typical: i7-8700K: 3.3V @ 0.35A (1.155Watt); 5V @ 0.62A (3.1Watt); 12V @ 0.54A (6.48Watt) Max.: i7-8700K: 3.3V @ 0.35A (1.155Watt); 5V @ 1.35A (6.75Watt); 12V @ 12.3A (147.6Watt)
	RTC BATTERY	CR2032 Coin Cell
OS SUPPORT		Windows 10 Pro 64-bit Windows 10 IoT Enterprise 64-bit Linux
ENVIRONMENT	TEMPERATURE	Operating: 0 to 60°C Storage: -30 to 60°C with RTC Battery; -40 to 85°C without RTC Battery
	HUMIDITY	Operating: 5 to 90% RH Storage: 5 to 90% RH
	MTBF	582,202 hrs @ 25°C; 332,716 hrs @ 45°C; 207,812 hrs @ 60°C Calculation model: Telcordia Issue 4 Environment: GB, GC – Ground Benign, Controlled
MECHANICAL	DIMENSIONS	ATX Form Factor 305mm (12") x 244mm (9.6")
	HEIGHT	PCB: TBD Top Side: TBD Bottom Side: TBD
CERTIFICATIONS		CE, RoHS

MBU4155


MECHANICAL DRAWING

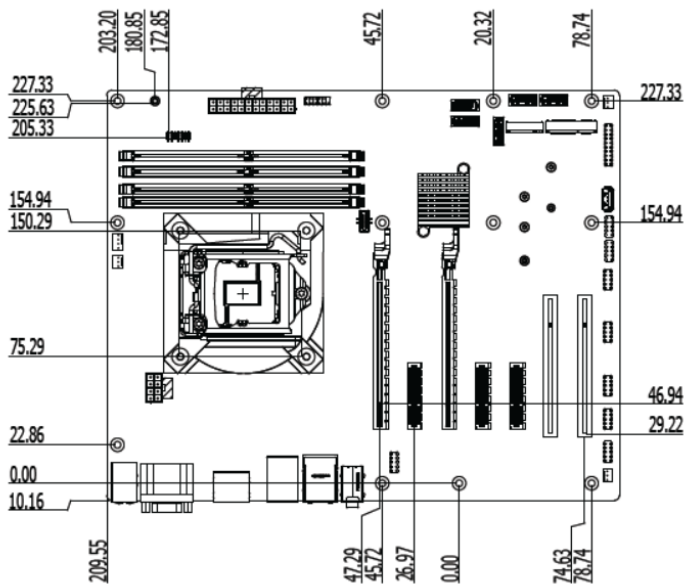

BLOCK DIAGRAM

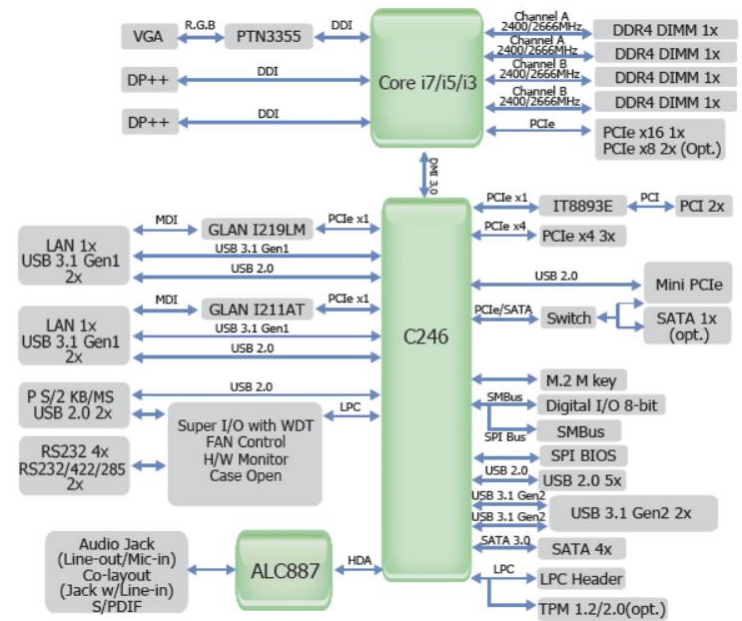

MOTHERBOARD LAYOUT

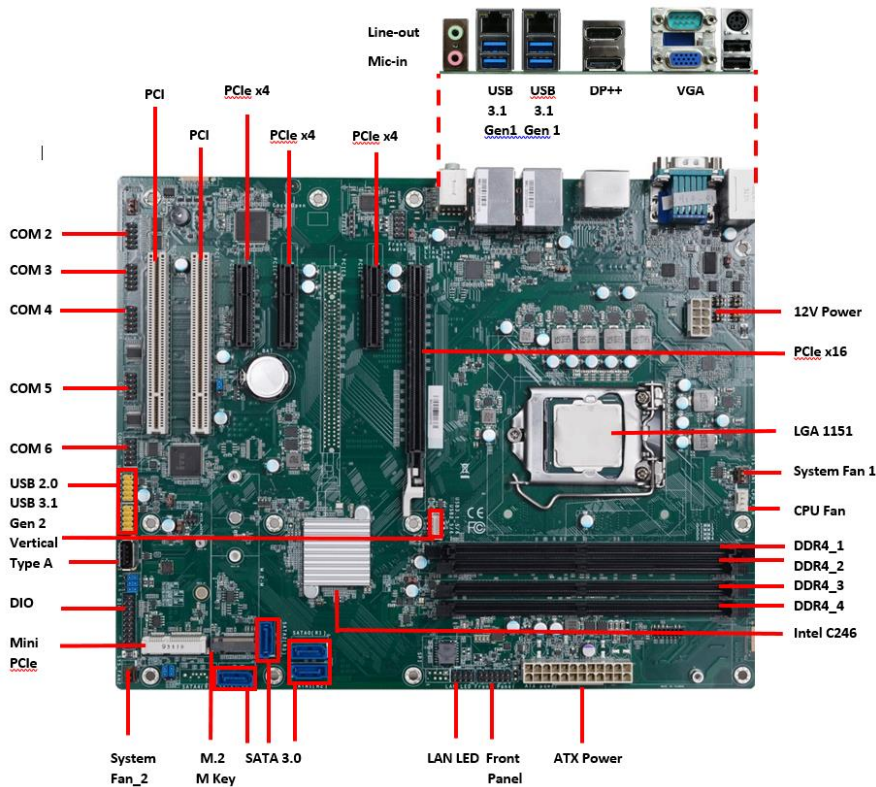

Company Address

Kontron UK Limited
Units 3, 4, 5, 9 & 10 New Bury Park
Marsh Lane, Easthampnett, UK
TEL: +44 (0) 1243 380780
uksales@kontron.com
www.industrial-computers.com