


MBU4170

Industrial Motherboard Series

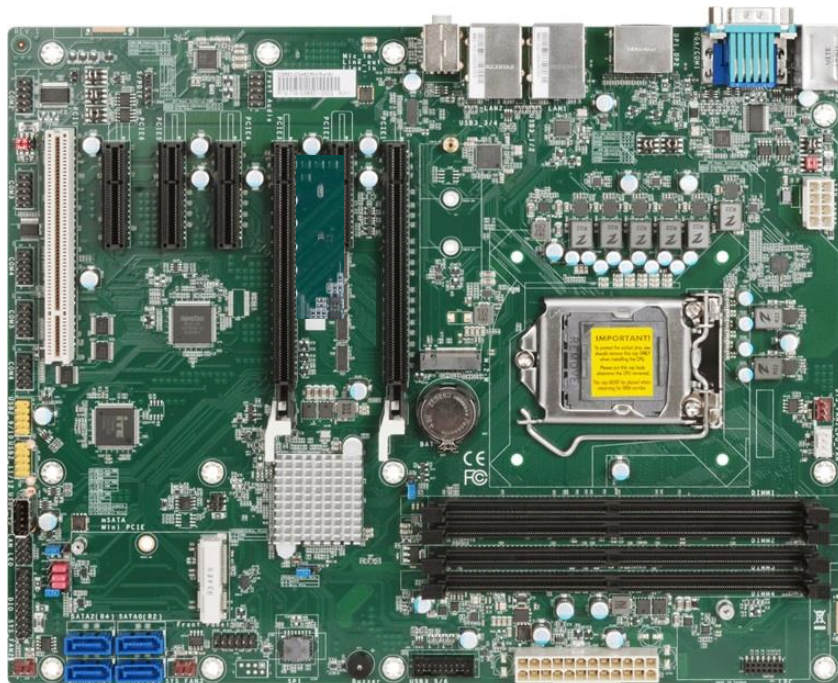

MBU4170

PRODUCT HIGHLIGHTS

- ▶ Intel 8th/9th Gen Intel® Xeon®/Core™ with Intel® C246
- ▶ 4 DDR4 ECC/Non-ECC DIMM up to 128GB
- ▶ Multiple expansion: 2 PCIe x16, 3 PCIe x4, 1 PCIe x1, 1 PCI, 1 Full-sized Mini PCIe, 1 M.2 M key
- ▶ 3 independent displays: VGA + DP++ + DP++
- ▶ Rich I/O: 2 Intel GbE, 6 COM, 2 USB 3.1 Gen 2, 4 USB 3.1 Gen 1, 6 USB 2.0
- ▶ 15-Year CPU Life Cycle Support Until Q4' 33 (Based on Intel IOTG Roadmap)



TECHNICAL INFORMATION


SYSTEM	PROCESSOR	8th Generation Intel® Core™ /Pentium®/Celeron® LGA 1151 Processors: Intel® Xeon® E-2176G (6 Cores, 12M Cache, up to 4.7 GHz); 80W Intel® Xeon® E-2124G (4 Cores, 8M Cache, up to 4.5 GHz); 71W Intel® Core™ i7-8700K (6 Cores, 12M Cache, up to 4.7 GHz); 95W Intel® Core™ i7-8700 (6 Cores, 12M Cache, up to 4.6 GHz); 65W Intel® Core™ i7-8700T (6 Cores, 12M Cache, up to 4.0 GHz); 35W Intel® Core™ i5-8500 (6 Cores, 9M Cache, up to 4.1 GHz); 65W Intel® Core™ i5-8500T (6 Cores, 9M Cache, up to 3.5 GHz); 35W Intel® Core™ i3-8100 (4 Cores, 6M Cache, 3.6 GHz); 65W Intel® Core™ i3-8100T (4 Cores, 6M Cache, to 3.1 GHz); 35W Intel® Pentium® G5400 (2 Cores, 4M Cache, 3.7 GHz); 58W Intel® Pentium® G5400T (2 Cores, 4M Cache, 3.1 GHz); 35W Intel® Celeron® G4900 (2 Cores, 2M Cache, 3.1 GHz); 54W Intel® Celeron® G4900T (2 Cores, 2M Cache, 2.9 GHz); 35W 9th Generation Intel® Core™ LGA 1151 Socket Processors: Intel® Xeon® E-2278GE (8 Cores, 16M Cache, up to 4.7 GHz); 80W Intel® Xeon® E-2278GEL (8 Cores, 16M Cache, up to 3.9 GHz); 35W Intel® Xeon® E-2226GE (6 Cores, 12M Cache, up to 4.6 GHz); 80W Intel® Core™ i9-9900K (8 Cores, 16M Cache, up to 5.0 GHz); 95W Intel® Core™ i7-9700K (8 Cores, 12M Cache, up to 4.9 GHz); 95W Intel® Core™ i7-9700E (8 Cores, 12M Cache, up to 4.4 GHz); 65W Intel® Core™ i7-9700TE (8 Cores, 12M Cache, up to 3.8 GHz); 35W Intel® Core™ i5-9500E (6 Cores, 9M Cache, up to 4.2 GHz); 65W Intel® Core™ i5-9500TE (6 Cores, 9M Cache, up to 3.6 GHz); 35W Intel® Core™ i3-9100E (4 Cores, 6M Cache, 3.7 GHz); 65W Intel® Core™ i3-9100TE (4 Cores, 6M Cache, to 3.2 GHz); 35W
	CHIPSET	Intel® C246 Chipset
	MEMORY	Four 288-pin Non-ECC DIMM up to 128GB Dual Channel DDR4 2400/2666MHz (Core™ i5/i7 only support non-ECC)
	BIOS	AMI SPI 128Mbit
GRAPHICS	CONTROLLER	Intel® HD Gen 9 Graphics
	FEATURE	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264,MPEG2,VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9
	DISPLAY	1 x VGA 2 x DP++ VGA: resolution up to 1920x1200 @ 60Hz DP++: resolution up to 4096x2160 @ 60Hz
	TRIPLE DISPLAYS	VGA + DP++ + DP++

TECHNICAL INFORMATION (CONTINUED)


EXPANSION	INTERFACE	2 x PCIe x16 (Gen 3) (1 x16 signal or 2 x8 signals) 3 x PCIe x4 (Gen 3) 1 x PCIe x1 (Gen 3) 1 x PCI 1 x Full-sized Mini PCIe (PCIe/SATA/USB2.0), share with SATA 3(R5) 1 x M.2 2242/2260/2280 M key (PCIe Gen3 x4 NVMe/SATA)
AUDIO	AUDIO CODEC	Realtek ALC888
ETHERNET	CONTROLLER	1 x Intel® I211AT PCIe (10/100/1000Mbps) 1 x Intel® I219LM PCIe with iAMT12.0 (10/100/1000Mbps) (only Xeon, Core i7/i5 supports iAMT)
REAR I/O	ETHERNET	2 x GbE (RJ-45)
	SERIAL	1 x RS-232/422/485 (RS-232 w/power (DB-9)
	USB	2 x USB 3.1 Gen 2 2 x USB 3.1 Gen 1 2 x USB 2.0
	PS/2	1 x PS/2 (mini-DIN-6)
	DISPLAY	1 x VGA 2 x DP++
	AUDIO	1 x Line-out, 1 x Mic-in, 1 x Line-in (opt., MOQ required)
INTERNAL I/O	SERIAL	1 x RS-232/422/485 (RS-232 w/ power) (2.54mm pitch) 4 x RS-232 (2.54mm pitch)
	USB	2 x USB 3.1 Gen 1 (2.00mm pitch) 4 x USB 2.0 (2.54mm pitch) (1 x USB 2.0 Colay vertical Type A) (opt., MOQ required)
	AUDIO	1 x S/PDIF 1 x Front Audio Header
	SATA	4 x SATA 3.0 (shared with mini PCIe (SATA), default at mini PCIe) RAID 0/1/5/10
	DIO	1 x 8-bit DIO
	LPC	1 x LPC (supports LPC EXT-RS232/RS485 module)
	SMBUS	1 x SMBus
	OUTPUT & INTERVAL	System Reset, Programmable via Software from 1 to 255 Seconds
	SECURITY TPM	Infineon TPM2.0 (opt., MOQ required)
	TYPE	ATX
	CONNECTOR	8-pin ATX 12V power 24-pin ATX power
	CONSUMPTION	Typical: i7-8700K: 3.3V @ 0.34A (1.122Watt); 5V @ 0.58A (2.9Watt); 12V @ 0.65A (7.8Watt) Max.: i7-8700K: 3.3V @ 0.52A (1.716Watt); 5V @ 1.27A (6.35Watt); 12V @ 13.01A (156.12Watt)
	RTC BATTERY	CR2032 Coin Cell
OS SUPPORT		Windows 10 Pro 64-bit Windows 10 IoT Enterprise 64-bit Linux
ENVIRONMENT	TEMPERATURE	Operating: -5 to 65°C Storage: -30 to 60°C with RTC Battery; -40 to 85°C without RTC Battery
	HUMIDITY	Operating: 5 to 95% RH Storage: 5 to 95% RH
	MTBF	534,017 hrs @ 25°C; 298,488 hrs @ 45°C ; 184,547 hrs @ 60°C ; 133,068 hrs @ 70°C Calculation Model: Telcordia Issue 4 Environment: GB, GC - Ground Benign, Controlled
MECHANICAL	DIMENSIONS	ATX Form Factor 305mm (12") x 244mm (9.6")
	HEIGHT	PCB: 1.6mm / Top Side: TBD Bottom Side: TBD
CERTIFICATIONS		CE, FCC, RoHS, KCC

MBU4170


MECHANICAL DRAWING

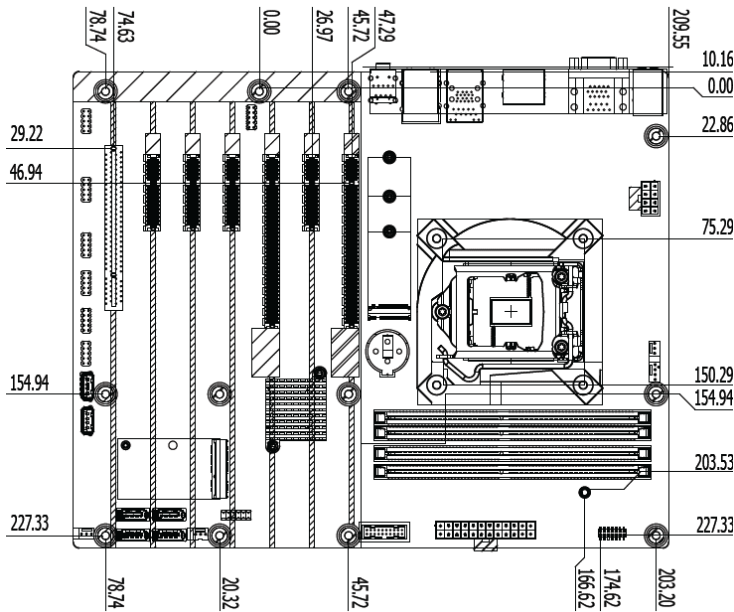

BLOCK DIAGRAM

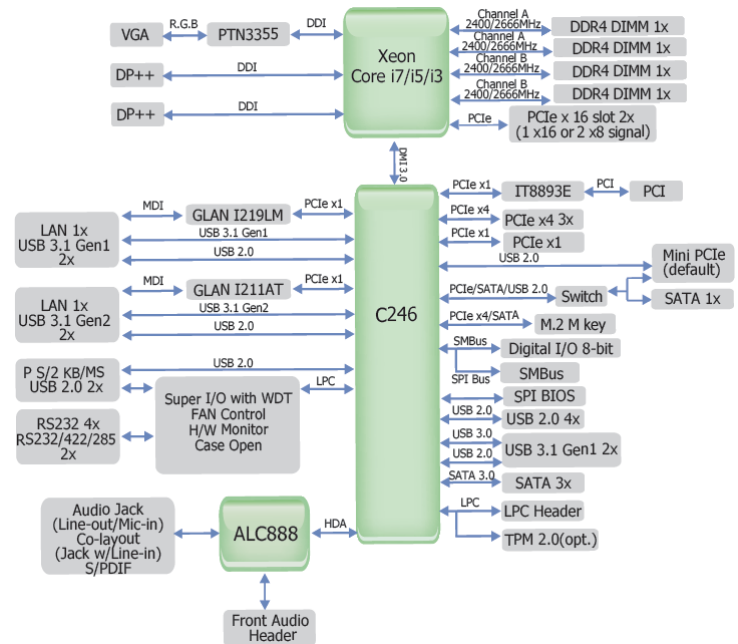

MOTHERBOARD LAYOUT

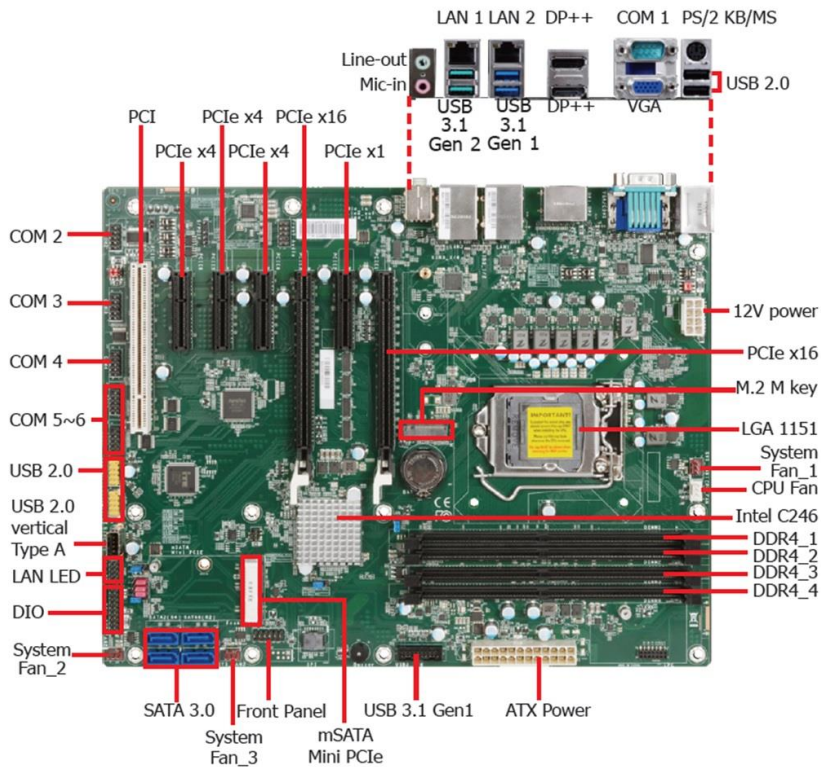

Company Address

Kontron UK Limited
Units 3, 4, 5, 9 & 10 New Bury Park
Marsh Lane, Easthampnett, UK
TEL: +44 (0) 1243 380780
uksales@kontron.com
www.industrial-computers.com