


PPC2015

Industrial Panel PC Series

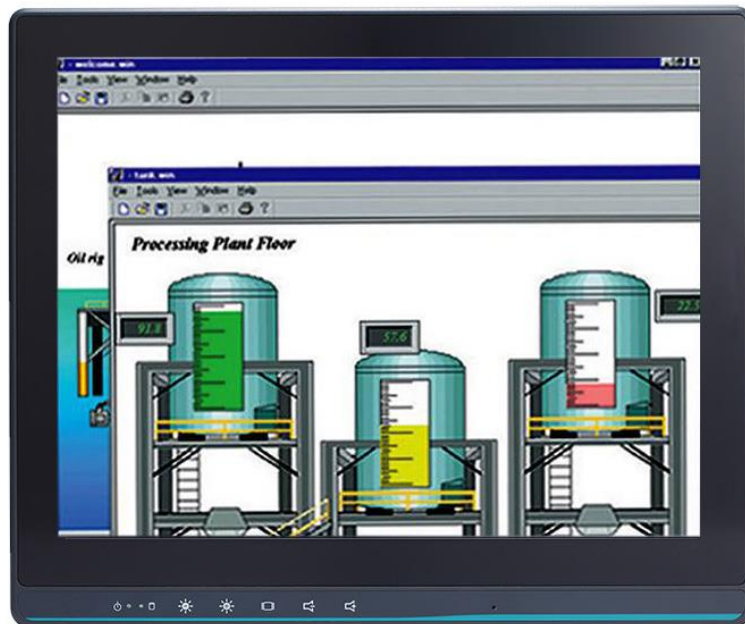

PPC2015

PRODUCT HIGHLIGHTS

- ▶ 15" XGA TFT LCD display with LED backlight
- ▶ Fanless design with Intel® Celeron® processor N3350 or Intel® Pentium® processor N4200
- ▶ 2 GbE LAN, 4 USB and 2 COM
- ▶ IP65-rated plastic front bezel
- ▶ Supports RFID and wireless module (optional)
- ▶ External AT/ATX mode selection switch
- ▶ Easy access storage & RAM design
- ▶ Supports panel mount, wall mount, VESA arm and desktop stand
- ▶ Programmable OSD function key




TECHNICAL INFORMATION

PANEL	15" XGA TFT LCD with LED backlight 300 nits (XGA) 1024 x 768 pixels
PROCESSOR	Intel® Celeron® processor N3350 2 cores (up to 2.4 GHz) Intel® Pentium® processor N4200 4 cores (up to 2.5 GHz)
CHIPSET	SoC integrated
SYSTEM MEMORY	1 x 204-pin DDR3L-1600 SO-DIMM, up to 8GB
BIOS	AMI UEFI BIOS
COM	1 x RS-232 1 x RS-232/422/485
USB	2 x USB 2.0 2 x USB 3.0
ETHERNET	2 x 10/100/1000 Mbps Ethernet
AUDIO	1 x Audio (Line-out)
STORAGE	1 x 2.5" SATA HDD (9.5 mm height) 1 x mSATA 1 x MicroSD card
EXPANSION	1 x M.2 Key E for wireless module 1 x Full-size PCI Express Mini Card slot
OTHERS	1 x Screw type connector for power 1 x Power button (ATX) 1 x Remote power switch 1 x AT/ATX mode selection switch
TOUCHSCREEN	Projected capacitive multi-touch 5-wire flat resistive touch
FRONT BEZEL	IP65, plastic front bezel
POWER SUPPLY	DC version: 9 to 24 VDC with adapter cable
POWER CONSUMPTION	28.8W
WATCHDOG TIMER	255 levels, 0 to 255 sec.
OPERATING TEMPERATURE	0°C to +50°C (+32°F to +122°F)
RELATIVE HUMIDITY	10% - 90% @ +40°C; non-condensing
VIBRATION	2G, 5 - 500Hz, random for SSD
DIMENSIONS (W X D X H)	329.69 mm (13") (W) x 50 mm (2") (D) x 306 mm (12") (H)
WEIGHT (NET/GROSS)	3.2 kg (7.1 lb)/4.8 kg (10.6 lb)
CERTIFICATIONS	CE, FCC, UL60950-1
OS SUPPORT	Windows® 10
MOUNTING	Panel mount Wall mount VESA arm Desktop stand

► TECHNICAL INFORMATION (CONTINUED)

PART NUMBERS	PPC2015: 15" XGA fanless touch panel computer with Intel® Celeron® processor N3350 on board, projected capacitive, EMI Class A, screw type connector with DC cable PPC2015-01: 15" XGA fanless touch panel computer with Intel® Celeron® processor N3350 on board, 5 wire resistive touch, EMI Class A, screw type connector with DC cable PPC2015-02: 15" XGA fanless touch panel computer with Intel® Pentium® processor N4200 on board, projected capacitive multi-touch, EMI Class A, screw type connector with DC cable PPC2015-03: 15" XGA fanless touch panel computer with Intel® Pentium® processor N4200 on board, 5 wire resistive touch, EMI Class A, screw type connector with DC cable
OPTIONS	Wi-Fi + Bluetooth kit Panel mount kit Wall mount kit Stand kit RFID kit AC Adapter

► MECHANICAL DRAWING

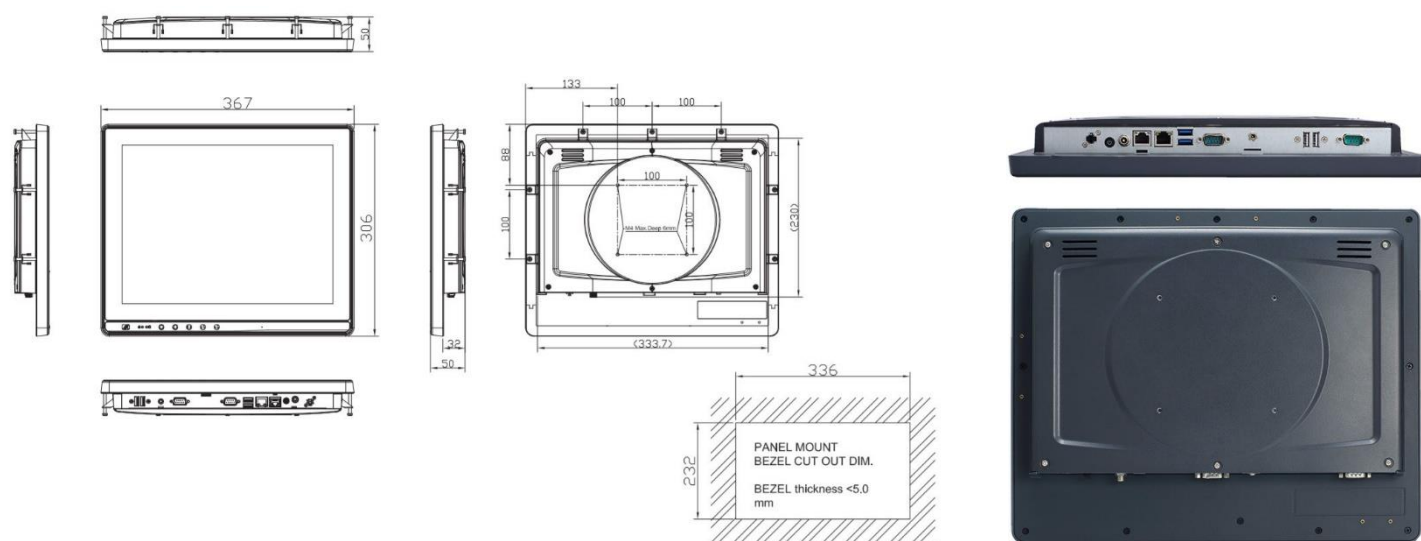

► Company Address

Kontron UK Limited
 Units 3, 4, 5, 9 & 10 New Bury Park
 Marsh Lane, Easthampnett, UK
 TEL: +44 (0) 1243 380780
uksales@kontron.com