

PPC2026

Industrial Panel PC Series



PPC2026

PRODUCT HIGHLIGHTS

- ▶ 21.5" FHD 10-point multi-touch projected capacitive widescreen
- ▶ LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor
- ▶ Intel® H110 chipset
- ▶ 4 USB 3.0 and 2 COM
- ▶ 2.5" SATA HDD and mSATA
- ▶ WLAN module & antenna (optional)
- ▶ IP65-rated front bezel
- ▶ Supports panel mount and VESA arm/wall mount (optional)
- ▶ Built-in speakers and swappable hard drive design




TECHNICAL INFORMATION

PANEL	21.5" FHD TFT 250 nits 1920 x 1080 pixels
PROCESSOR	LGA1151 socket 7/6th gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor
CHIPSET	Intel® H110
SYSTEM MEMORY	2 x 260-pin DDR4-2400 SO-DIMM, up to 32GB
BIOS	AMI
COM	2 x RS-232/422/485
USB	4 x USB 3.0
ETHERNET	2 x 10/100/1000 Mbps (Intel® i219-V & Intel® i211-AT)
DISPLAY	1 x HDMI v1.4 1 x VGA (up to 1920 x 1200 60Hz) 1 x DisplayPort v1.2 (DP++)
AUDIO	1 x Audio (Mic-in & Line-out)
STORAGE	1 x 2.5" SATA HDD (9.5 mm height)
EXPANSION	1 x Half-size PCI Express Mini Card slot with mPCIe 1 x Full-size PCI Express Mini Card slot with mSATA or mPCIe
OTHERS	Speaker WLAN Module WLAN antennas
TOUCHSCREEN	10-point projected capacitive multi-touch 5-wire flat resistive touch
FRONT BEZEL	Aluminium w/ IP65/NEMA 4 rugged protection
POWER SUPPLY	DC terminal block: +12V/+19V/+24V AC adapter: 19V, 6.32A
POWER CONSUMPTION	105W
WATCHDOG TIMER	255 levels, 1 to 255 sec.
OPERATING TEMPERATURE	0°C to +45°C (+32°F to +113°F)
RELATIVE HUMIDITY	10% to 90% @ 40°C; non-condensing
VIBRATION	1G, 5 - 500 Hz, random for 2.5" SATA HDD
DIMENSIONS (W X D X H)	547.59 x 339.05 x 75.6 mm (21.56" x 13.49" x 2.98")
WEIGHT (NET/GROSS)	8.4 kg (18.5 lb)/11.3 kg (24.9 lb)
CERTIFICATIONS	CE
OS SUPPORT	Windows® 7, Windows® 8.1, Windows® 10
MOUNTING	Panel mount VESA arm Desktop stand Wall mount

► TECHNICAL INFORMATION (CONTINUED)

PART NUMBERS	PPC2026: 21.5" FHD TFT fanless multi-touch panel computer with LGA1151 socket 7th/6th gen Intel® Core™, Pentium®, Celeron® processor, 10-point projected capacitive multi-touch screen and 12/19/24 VDC terminal block connector. With adapter and Panel Mount kit PPC2026-01: 21.5" FHD TFT fanless multi-touch panel computer with LGA1151 socket 7th/6th gen Intel® Core™, Pentium®, Celeron® processor, 10-point projected capacitive multi-touch screen and 12/19/24 VDC terminal block connector. Without adapter and Panel Mount kit PPC2026-02: 21.5" FHD TFT fanless touch panel computer with LGA1151 socket 7th/6th gen Intel® Core™, Pentium®, Celeron® processor, 5-wire flat resistive touch screen and 12/19/24 VDC terminal block connector. With adapter and Panel Mount kit
OPTIONS	Wi-Fi kit Wall mount kit AC Adapter Panel mount kit

► MECHANICAL DRAWING

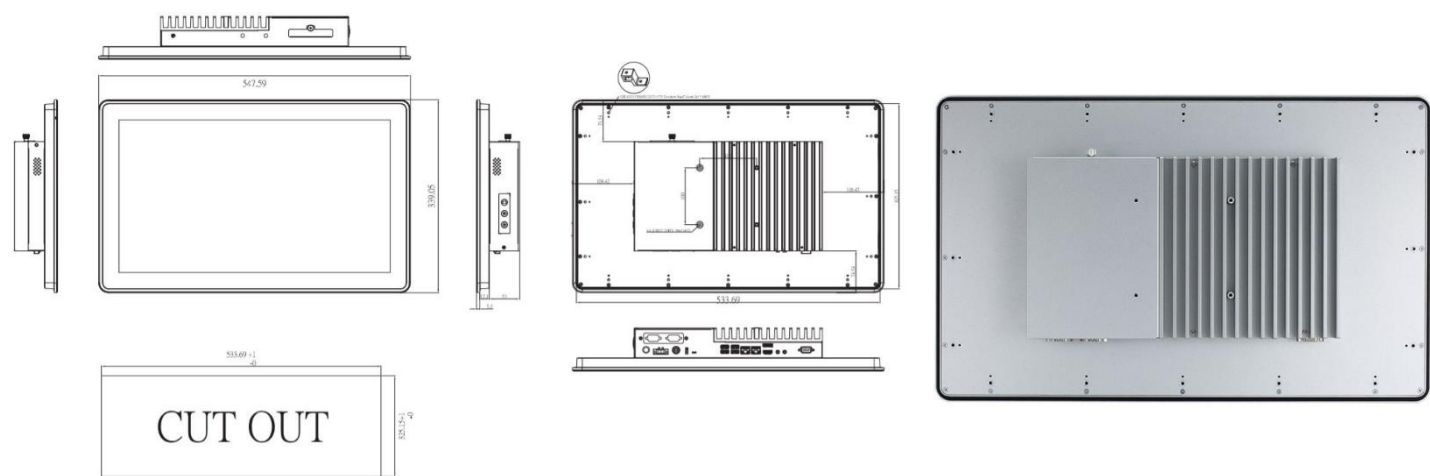

► Company Address

Kontron UK Limited
 Units 3, 4, 5, 9 & 10 New Bury Park
 Marsh Lane, Easthampnett, UK
 TEL: +44 (0) 1243 380780
 uksales@kontron.com
www.industrial-computers.com