

MFS-11 Series

Industrial Fanless Systems




MFS-11 Series

PRODUCT HIGHLIGHTS

- ▶ Intel® 11th Gen Tiger Lake-UP3 Core i7/i5/i3/Celeron ULV processors
- ▶ Outstanding graphics with Integrated Intel® Iris Xe graphics
- ▶ Intel® vPro technology support
- ▶ 1 x DDR4 SO-DIMM and support up to 32GB
- ▶ Support Quadruple display for HDMI, and DisplayPort
- ▶ 1 x Hot Swappable SSD/HDD slot
- ▶ 2 x Intel® Gigabit Ethernet (Option: additional 2 x LAN)
- ▶ 2 x USB 2.0, 4 x USB 3.1 Gen2 and 4 x COM
- ▶ 8V~24V wide voltage power input or AC options

TECHNICAL INFORMATION

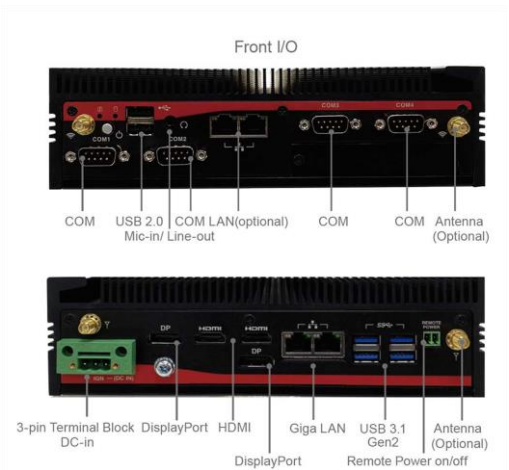


PROCESSOR	Integrated Processor options: - Core™ i7-1185G7E 4 Core, 8 threads, PBF 1.80GHz, Turbo Mode 4.40GHz, 12W - Core™ i5-1145G7E 4 Core, 8 threads, PBF 1.50GHz, Turbo Mode 4.10GHz, 15W - Core™ i3-1115G4E 2 Core, 4 threads, PBF 2.20GHz, Turbo Mode 3.90GHz, 15W - Core™ Celeron 6305E 2 Core, 2 threads, PBF 1.80GHz, 15W
CHIPSET	Intel® SoC Integrated
SYSTEM MEMORY	DDR4 3200 MHz / 1 x 260-pin SO-DIMM / Max. 32GB (Non-ECC)
DISPLAY	DisplayPort 1.2 / HDMI 1.4
ETHERNET	Intel® I219-LM Giga LAN / Intel® I225-LM 2.5GbE LAN Option to add additional 2 x Intel® I210-IT Giga LAN
AUDIO	Realtek® ALC256
I/O CHIPSET	Nuvoton NCT6126D(eSPI)
TPM	Nuvoton NPCT750AABYX TPM2.0
EXPANSION SLOT	Wireless: M.2 2230 E key (PCIe, USB) / Storage/LTE/5G Slot: M.2 2280/2260/2242/3042/3052 B Key (USB2.0/*PClex1/SATAIII) *Does not support M.2 M Key NVMe SSD / **5G card support is by BOM option. Please check with sales about the M.2 B Key 3052 5G card spec.
INDICATORS	Power LED / HDD LED
STORAGE DEVICE	1 x Hot Swappable 2.5 HDD / SSD (Maximum 9.5mm height) / 1 x M.2 B Key 2280/2260/2242 Slot
FRONT I/O	2 x SMA Antenna (Optional for Wi-Fi/LTE function) / 3 x RS232 / 1 x Audio Combo Jack (Mic-in and Line-out) / 1 x Hot Swappable 2.5" SSD/HDD slot (Maximum 9.5mm height) / 2 x USB 2.0 / 1 x RS232 / 422 / 485 / HDD LED / Power Button w/ Power Indicator
REAR I/O	2 x DisplayPort 1.2 / 2 x HDMI 1.4 / 2 x RJ-45 / 4 x USB 3.1 Gen 2 (10 Gbps) / 1 x 3-pin Terminal Block Power Input / 1 x 2-pin Terminal Block Remote Power on / off / 2 x SMA Antenna (Optional for Wi-Fi/LTE function)
H/W MONITOR	Temperature Monitor / Voltage Monitor
WATCHDOG TIMER	1~255 steps by software program
POWER INPUT	8~24V Wide Range DC Input w/ Terminal Block Connectivity
POWER ADAPTER	DC24V / 3A / AC / DC / 72W adapter (For AC SKU)
DIMENSIONS	8.3" x 5.9" x 2.5" (210 x 150 x 63 mm)
MOUNTING	Wallmount / Side Mount / 75 mm x 75 mm VESA Holes & Din Rail Mount Combo Kit (Optional)
ENVIRONMENT	Operating Temperature: 15W TDP: -40 ~ 70°C with 0.7m/s Air Flow (w/ Extended Temp. SSD/mSATA/RAM) / 28W TDP: -40 ~ 60°C with 0.7m/s Air Flow (w/ Extended Temp. SSD/mSATA/RAM) Storage Temperature: -40 ~ 85°C (-40 ~185°F) Operating Humidity: 10% ~ 95% R/H (Non-condensing)
SHOCK & VIBRATION	Vibration: Operating: 5Hz~500Hz / 3Grms / 3Axis (w/ SSD, according to IEC60068-2-64) Shock: Operating: 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)
CERTIFICATIONS	CE / FCC Class A

► TECHNICAL INFORMATION (CONTINUED)

OS SUPPORT	Windows® 10 64-bit / Linux (support by request)
PART NUMBERS	AC models: MFS-11-C6305: Celeron 6305E AC powered fanless system MFS-11-CI3: Core i3-1115G4E AC powered fanless system MFS-11-CI5: Core i5-1145G7E AC powered fanless system MFS-11-CI7: Core i7-1185G7E AC powered fanless system DC models: MFS-11-C6305DC: Celeron 6305E DC powered fanless system MFS-11-CI3DC: Core i3-1115G4E DC powered fanless system MFS-11-CI5DC: Core i5-1145G7E DC powered fanless system MFS-11-CI7DC: Core i7-1185G7E DC powered fanless system
OPTIONS	Additional 2 x LAN ports AI accelerating card

► MECHANICAL DRAWING

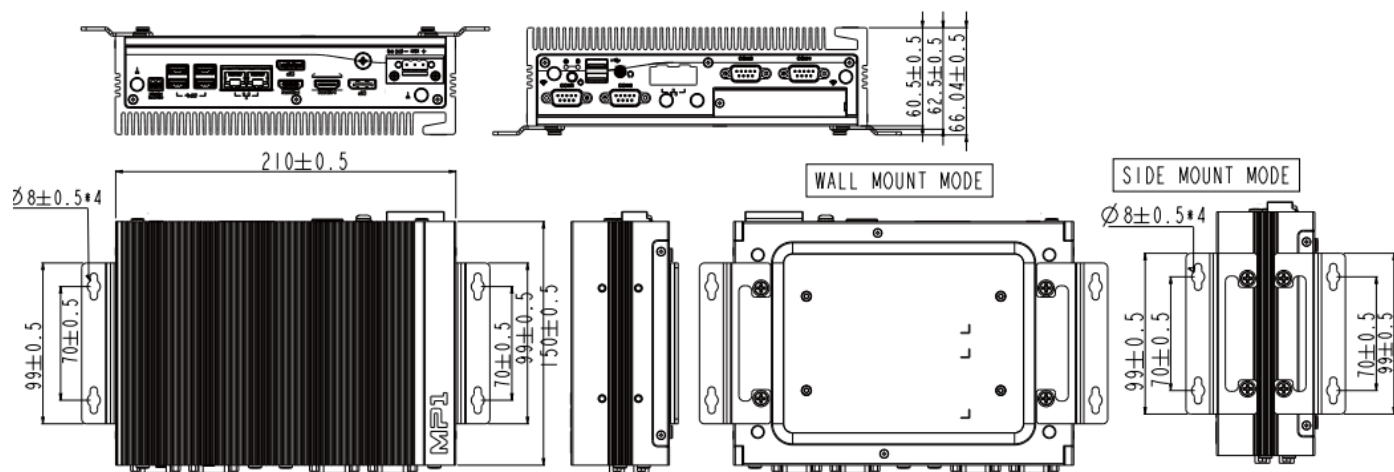

► Company Address

Kontron UK Limited
Units 3, 4, 5, 9 & 10 New Bury Park
Marsh Lane, Easthampnett, UK
TEL: +44 (0) 1243 380780
uksales@kontron.com
www.industrial-computers.com