




15" IP65 Industrial 4:3 XGA LCD Flush Touch Monitor

- 15" Industrial monitor with 5-wire touch screen
- Triple display inputs VGA/DVI-D & DisplayPort
- XGA 1024 x 768 resolution
- IP65 front panel for dust and water protection
- 24V DC input with optional AC adapter
- Contrast ratio: 2500:1
- Luminance: 400cd/m²
- Operating temperature: -20°C~60°C
- Dimensions: 384.25 x 309.83 x 53.2mm

PANEL	LCD size: 15", 4:3 Resolution: XGA 1024 x 768 Luminance: 400cd/m2 Contrast ratio: 2500:1 LCD colour: 16.7M Viewing angle: 88 (U), 88 (D), 88 (L), 88 (R) Backlight: LED
TOUCHSCREEN	5-Wire resistive (flush panel type); Light transmission: 81% Interface: USB and RS232 (optional)
REAR I/O	Touch screen interface port: RS-232 (1 x DB9)/USB type A Input: VGA (1 x DB15)/DVI-D (1 x DVI-I connector)/DisplayPort DC power input connector: 3-pin Phoenix terminal Blocks
OSD	OSD keypad
MECHANICAL & ENVIROMENTAL	Colour: Pantone black and black silver chassis IP protection: IP65 front Mounting: panel/wall/stand/VESA 100mm x 100mm Power input: 24VDC ±20% Vibration: IEC 68 2-64; 2Grms @ sine, 5~500Hz, 1hr/axis (operating); 2.2Grms @ random condition, 5~500Hz, 0.5hr /axis (non-operating) Shock: IEC 68 2-27; 20G@wall mount, half sine, 11ms Operating temperature: -20°C~60°C Storage temperature: -20°C~75°C Operating humidity: 10%~90% relative humidity, non-condensing, 90% RH at max 50°C Dimension: 384.25 x 309.83 x 53.2mm Weight: 3.9 kg
CERTIFICATIONS	CE approval FCC Class B
POWER SUPPLY OPTIONS	24V, 60W AC/DC power adapter w/o power cord

Dimensions

Additional image

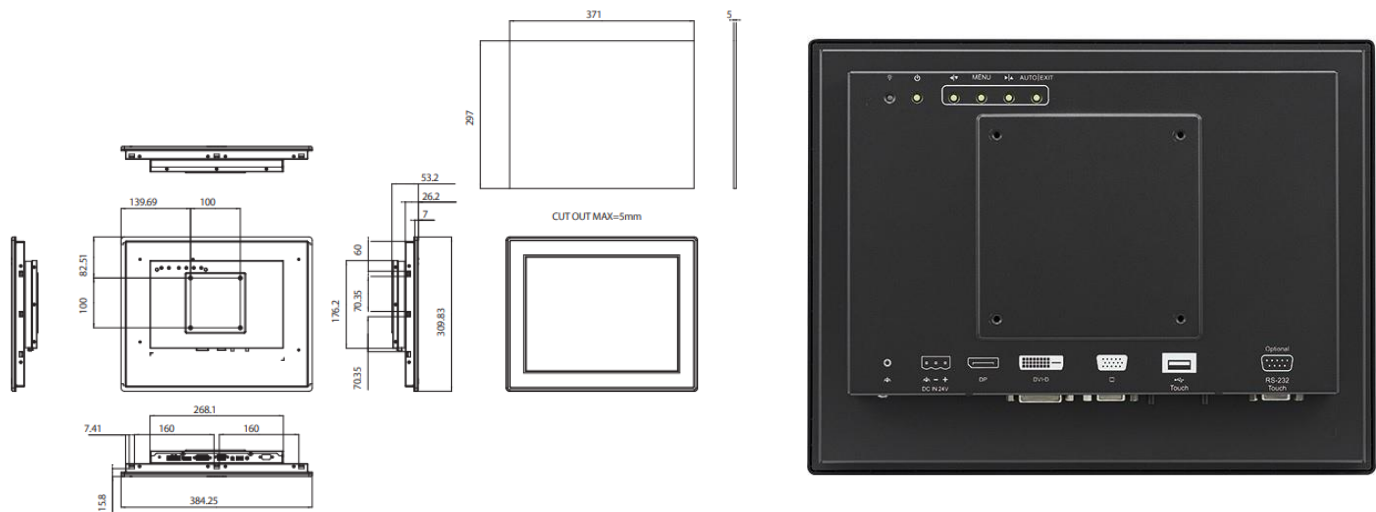

Standard Services



Integrated Components



Revision Controlled



Fully Tested & Documented



Software Installed



Full Traceability



ISO Certified



OEM Customisation