



Case Mount

Features:

- Standard IP65/NEMA 4 sealing
- Rugged metal construction
- Industrial grade components
- 17" displays as standard
- Stainless steel Bezel mount or cased
- 75mm VESA mount options



17" Bezel Mount

Description

The SlimMonitor has been designed for operation in industrial environments over a wide temperature range. Its tough stainless steel finish makes it ideal for harsh applications and high sealing options are suitable for wash down areas. Utilising industrial components allows the SlimMonitor to offer exceptional quality, long term availability

Specification

Brightness

- 300 c/d

Filter

- 3mm Margard polycarbonate

Supply Voltage

- 12 VDC or 100~240VAC Power Block (Bezel mount) or 95~265 VAC PSU (Cased)

Power Consumption

- <35W (Typ.)

Storage Temperature

- -10°C to +60°C

Operating Temperature

- 0°C to +40°C

Weight

- 11Kg

Sealing

- IP22 / IP65 / 67

Rear output


- 4 Way EPG Gland output

Resolution



- 1280 x 1024 Scalable
- Scalable down to:
 - 1024 x 768 (15" Resolution)
 - 800 x 600 (12" Resolution)
 - 640 x 480 (10.4" Resolution)

Options

- Touchscreen (Resistive)
- Extended Temperature (-25°C to +50°C)

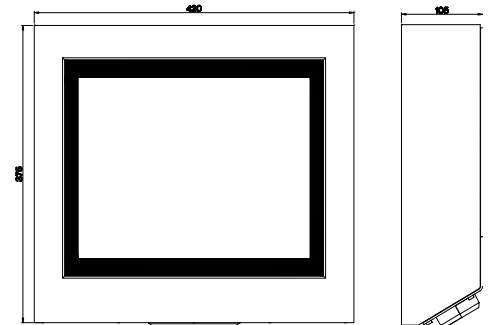

Bezel Mount Dimensions:

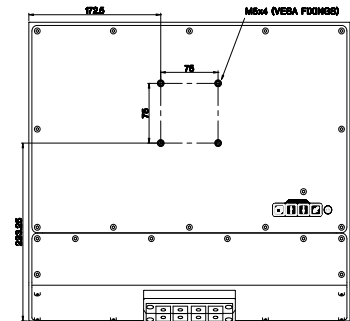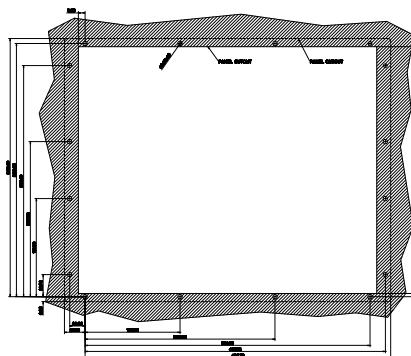

Ordering Information

SSM-IP65-1710 - (RoHS Compliant) 17" LCD IP65 Stainless Steel Cased Monitor

SSM-IP65-1711 - (RoHS Compliant) 17" LCD IP65 Stainless Steel Panel Mount Monitor